



Technical data

Тор:	With top
Gross capacity:	280 lt
Temperature range:	-2°+8°C
Refrigerant unit:	Plug-In
Cooling gas:	R290
Defrost:	Hot gas
Body height:	710 mm
Valve:	Supplied standard with solenoid
Dimensions (mm):	1300×700×1005 mm
Packing dimensions:	1395×800×998 mm
Gross weight:	160 Kg
Voltage:	220-240 V - 50 Hz
Total rate:	250 W
Absorbed Current:	1,15 A
Cooling capacity:	406 W*
*.	Evap10°C Cond. +55°C

Client	Quantity
Project	Position

Prep-station GN1/1 counter 2 doors

Model: TVG13/1M-1/6- **Cod:** T10203000231

Tavolo refrigerato Prep-Station 700 con piano in granito, Plug-In, 2 porte con altezza corpo tavolo 710 mm, classe climatica 5 heavy duty e gas refrigerante ecologico R290. Contenitore refrigerato per bacinelle GN1/6 con coperchio apribile. Completo di 2 griglie GN1/1, configurabile con cassettiere 1/2+1/2, $1/3+2/3,\,1/3+1/3$. Range di temperatura -2°+8°C con refrigerazione ventilata. Struttura con isolamento 60 mm. Interno/esterno in acciaio inox AISI 304 compreso schiena esterna, fondo esterno in acciaio colaminato. Realizzato con tecnologia FSS - Fast Service System - per un service facile e veloce. Predisposto per collegamento a sistema di supervisione remoto.

Features

Standard equipment:	2 slides, 2 plastic coated GN1/1 shelves
Control:	Electronic, display flush with the panel
Doors:	2 doors, self-closing, reversible with 105° stop
Door gasket:	Magnetic, triple chamber and easily replaceable
Insulation:	60 mm thickness - CFC/HCFC free
Exterior/interior finishing:	Exterior interior and back in AISI 304 stainless steel. Base in colaminated steel
Inner corners:	Rounded for easy cleaning and ensuring maximum hygiene
Lid hinges:	Made on black plastic
Handle:	Stainless steel AISI 304, 2 mm thick
Racks and slides:	Stainless steel AISI 304
Feets:	Stainless steel AISI 304, adjustable h 100-150 mm
Cosmo:	Ready for connection to Cosmo Hub

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.



Accessories and variants

Drawers 1/2	GN1/2 container + lids kit for drawer, h 150 mm	
Drawers 1/3	GN1/3 container + lids kit for drawer, h 150 mm	
Drawers 1/3 + 2/3	Stainless steel shelf GN1/1	
Special counter body heights 700 mm	Plastic coated shelf GN1/1	
Special counter body heights 750 mm	Pair of type C slides 505 mm	
Technical compartment on the left	Serial interface, RS485 cable	
Special size of technical compartment	Cosmo connection kit	
Lock with key for drawer 1/2	IP44 schuko socket with cover	
Lock with key for drawer 1/3	Prep-Station pans kit GN1/6 plug-in, 2D	
Lock with key for drawer 1/3 + 2/3	Removable plinth GN 2D h 50 mm	
LED lighting	Removable plinth GN 2D h 100 mm	
RAL customisable colouring	Removable plinth GN 2D h 150 mm	
Plug-in water unit		
Power supply frequency 60Hz	COSMO wi fi control	
Other special voltage	COSMO - wi-fi control	

Cosmo is the wi-fi technology that allow to connect and monitor all Coldline appliances. Connect Prep-Station counters to a Cosmo hub (MODI, VISION or LEVTRONIC) and from the app you can check the operating conditions of each machine and receive alerts in case of


*The installation requires a kit for the replacement of the racks

Technical draw

Adjustable feet h 145/195 mm

Brackets for GN pans for drawer

4 Swivel and brake castors h 128 mm

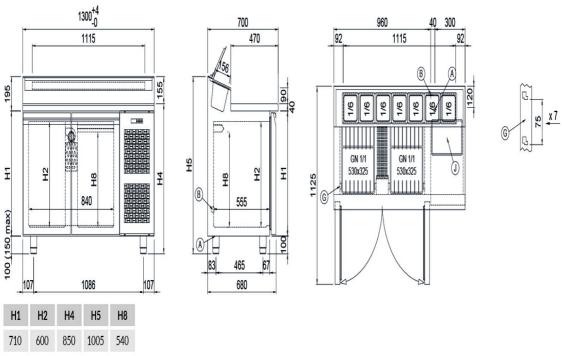

- A: Power supply cable outlet
- **B:** Condensation water drain
- **G:** Racks pitch

J: Automatic evaporation of condensing water

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.