

Client \_\_\_\_\_ Quantity \_\_\_\_\_  
 Project \_\_\_\_\_ Position \_\_\_\_\_

## Prep-station GN1/1 counter 2 doors

**Model:** TV13/1M-1/3-710      **Cod:** T10201000221



Tavolo refrigerato Prep-Station 700 con piano in inox, Plug-In, 2 porte con altezza corpo tavolo 710 mm, classe climatica 5 heavy duty e gas refrigerante ecologico R290. Contenitore refrigerato per bacinelle GN1/3 con coperchio apribile. Completo di 2 griglie GN1/1, configurabile con cassettiere 1/2+1/2, 1/3+2/3, 1/3+1/3+1/3. Range di temperatura -2°+8°C con refrigerazione ventilata. Struttura con isolamento 60 mm. Interno/esterno in acciaio inox AISI 304 compreso schiena esterna, fondo esterno in acciaio colaminato. Realizzato con tecnologia FSS - Fast Service System - per un service facile e veloce. Predisposto per collegamento a sistema di supervisione remoto.

### Technical data

|                            |                                 |
|----------------------------|---------------------------------|
| <b>Top:</b>                | With top                        |
| <b>Gross capacity:</b>     | 280 lt                          |
| <b>Temperature range:</b>  | -2°+8°C                         |
| <b>Refrigerant unit:</b>   | Plug-In                         |
| <b>Cooling gas:</b>        | R290                            |
| <b>Defrost:</b>            | Hot gas                         |
| <b>Body height:</b>        | 710 mm                          |
| <b>Valve:</b>              | Supplied standard with solenoid |
| <b>Dimensions (mm):</b>    | 1300×700×1005 mm                |
| <b>Packing dimensions:</b> | 1395×800×998 mm                 |
| <b>Gross weight:</b>       | 155 Kg                          |
| <b>Voltage:</b>            | 220-240 V - 50 Hz               |
| <b>Total rate:</b>         | 250 W                           |
| <b>Absorbed Current:</b>   | 1,15 A                          |
| <b>Cooling capacity:</b>   | 406 W*                          |
| <b>*:</b>                  | Evap. -10°C Cond. +55°C         |

### Features

|                                     |   |
|-------------------------------------|---|
| <b>Standard equipment:</b>          | 2 slides, 2 plastic coated GN1/1 shelves  |
| <b>Control:</b>                     | Electronic, display flush with the panel  |
| <b>Doors:</b>                       | 2 doors, self-closing, reversible with 105° stop                                  |
| <b>Door gasket:</b>                 | Magnetic, triple chamber and easily replaceable                                   |
| <b>Insulation:</b>                  | 60 mm thickness - CFC/HCFC free   |
| <b>Exterior/interior finishing:</b> | Exterior interior and back in AISI 304 stainless steel. Base in colaminated steel |
| <b>Inner corners:</b>               | Rounded for easy cleaning and ensuring maximum hygiene                            |
| <b>Lid hinges:</b>                  | Made on black plastic   |
| <b>Handle:</b>                      | Stainless steel AISI 304, 2 mm thick  |
| <b>Racks and slides:</b>            | Stainless steel AISI 304  |
| <b>Feets:</b>                       | Stainless steel AISI 304, adjustable h 100-150 mm                                 |
| <b>Cosmo:</b>                       | Ready for connection to Cosmo Hub   |

## Accessories and variants


|                                       |   |
|---------------------------------------|---|
| Drawers 1/2                           | GN1/2 container + lids kit for drawer, h 150 mm |
| Drawers 1/3                           | GN1/3 container + lids kit for drawer, h 150 mm |
| Drawers 1/3 + 2/3                     | Stainless steel shelf GN1/1                     |
| Special counter body heights 700 mm   | Plastic coated shelf GN1/1                      |
| Special counter body heights 750 mm   | Pair of type C slides 505 mm                    |
| Technical compartment on the left     | Serial interface, RS485 cable                   |
| Special size of technical compartment | Cosmo connection kit                            |
| Lock with key for drawer 1/2          | IP44 schuko socket with cover                   |
| Lock with key for drawer 1/3          | Prep-Station pans kit GN1/3 plug-in, 2D         |
| Lock with key for drawer 1/3 + 2/3    | Removable plinth GN 2D h 50 mm                  |
| LED lighting                          | Removable plinth GN 2D h 100 mm                 |
| RAL customisable colouring            | Removable plinth GN 2D h 150 mm                 |
| Plug-in water unit                    |   |
| Power supply frequency 60Hz           |   |
| Other special voltage                 |   |
| Adjustable feet h 145/195 mm          |   |
| 4 Swivel and brake castors h 128 mm   |   |
| Brackets for GN pans for drawer       |   |

### COSMO - wi-fi control

Cosmo is the wi-fi technology that allow to connect and monitor all Coldline appliances. Connect Prep-Station counters to a Cosmo hub (MODI, VISION or LEVTRONIC) and from the app you can check the operating conditions of each machine and receive alerts in case of

\*The installation requires a kit for the replacement of the racks

## Technical draw

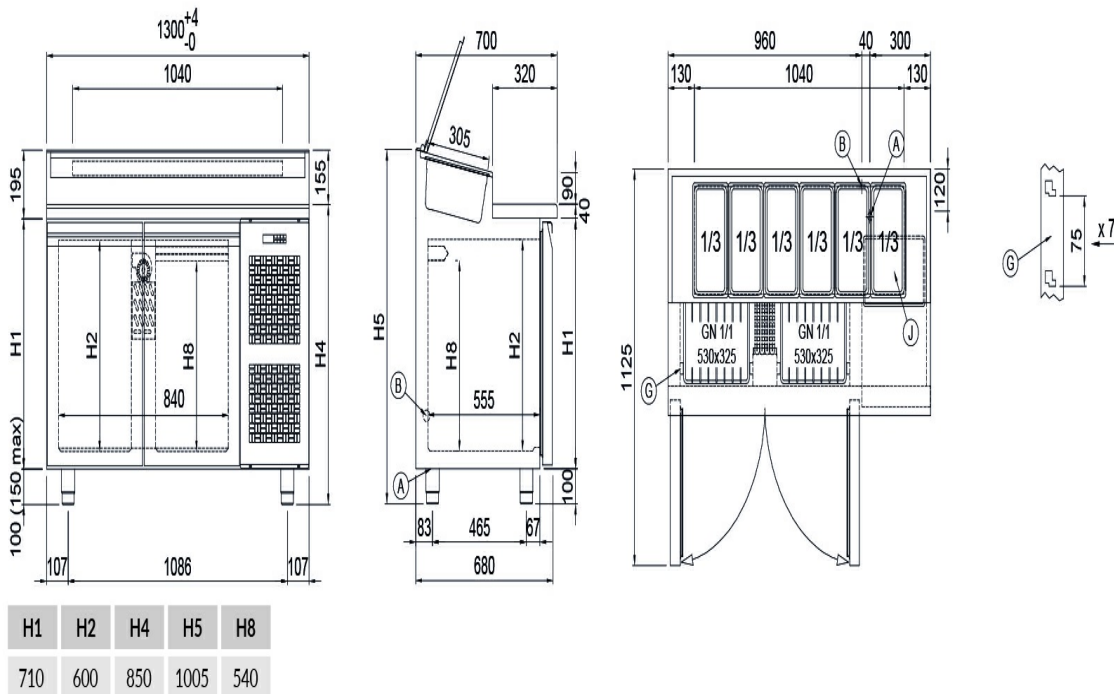

A: Power supply cable outlet

B: Condensation water drain

G: Racks pitch

J: Automatic evaporation of condensing water