

Client \_\_\_\_\_ Quantity \_\_\_\_\_  
 Project \_\_\_\_\_ Position \_\_\_\_\_

## Prep-station GN1/1 counter 3 doors

**Model:** TV17/1M-1/6-710      **Cod:** T10301000231



Tavolo refrigerato Prep-Station 700 con piano in inox, Plug-In, 3 porte con altezza corpo tavolo 710 mm, classe climatica 5 heavy duty e gas refrigerante ecologico R290. Contenitore refrigerato per bacinelle GN1/6 con coperchio apribile. Completo di 3 griglie GN1/1, configurabile con cassettiere 1/2+1/2, 1/3+2/3, 1/3+1/3+1/3. Range di temperatura -2°+8°C con refrigerazione ventilata. Struttura con isolamento 60 mm. Interno/esterno in acciaio inox AISI 304 compreso schiena esterna, fondo esterno in acciaio colaminato. Realizzato con tecnologia FSS - Fast Service System - per un service facile e veloce. Predisposto per collegamento a sistema di supervisione remoto.

### Technical data

<b>Top:</b>	With top
<b>Gross capacity:</b>	440 lt
<b>Temperature range:</b>	-2°+8°C
<b>Refrigerant unit:</b>	Plug-In
<b>Cooling gas:</b>	R290
<b>Defrost:</b>	Hot gas
<b>Body height:</b>	710 mm
<b>Valve:</b>	Supplied standard with solenoid
<b>Dimensions (mm):</b>	1780×700×1005 mm
<b>Packing dimensions:</b>	1875×800×998 mm
<b>Gross weight:</b>	170 Kg
<b>Voltage:</b>	220-240 V - 50 Hz
<b>Total rate:</b>	250 W
<b>Absorbed Current:</b>	1,15 A
<b>Cooling capacity:</b>	406 W*
<b>*:</b>	Evap. -10°C Cond. +55°C

### Features

<b>Standard equipment:</b>	3 coppie guida, 3 griglie plastificate GN1/1
<b>Control:</b>	Electronic, display flush with the panel
<b>Doors:</b>	3 doors, self-closing, reversible with 105° stop
<b>Door gasket:</b>	Magnetic, triple chamber and easily replaceable
<b>Insulation:</b>	60 mm thickness - CFC/HCFC free
<b>Exterior/interior finishing:</b>	Exterior interior and back in AISI 304 stainless steel. Base in colaminated steel
<b>Inner corners:</b>	Rounded for easy cleaning and ensuring maximum hygiene
<b>Lid hinges:</b>	Made on black plastic
<b>Handle:</b>	Stainless steel AISI 304, 2 mm thick
<b>Racks and slides:</b>	Stainless steel AISI 304
<b>Feets:</b>	Stainless steel AISI 304, adjustable h 100-150 mm
<b>Cosmo:</b>	Ready for connection to Cosmo Hub

## Accessories and variants


Drawers 1/2	GN1/2 container + lids kit for drawer, h 150 mm
Drawers 1/3	GN1/3 container + lids kit for drawer, h 150 mm
Drawers 1/3 + 2/3	Stainless steel shelf GN1/1
Special counter body heights 700 mm	Plastic coated shelf GN1/1
Special counter body heights 750 mm	Pair of type C slides 505 mm
Technical compartment on the left	Serial interface, RS485 cable
Special size of technical compartment	Cosmo connection kit
Lock with key for drawer 1/2	IP44 schuko socket with cover
Lock with key for drawer 1/3	Prep-Station pans kit GN1/6 plug-in, 3D
Lock with key for drawer 1/3 + 2/3	Removable plinth GN 3D h 50 mm
LED lighting	Removable plinth GN 3D h 100 mm
RAL customisable colouring	Removable plinth GN 3D h 150 mm
Plug-in water unit	
Power supply frequency 60Hz	
Other special voltage	
Adjustable feet h 145/195 mm	
4 Swivel and brake castors h 128 mm	
Brackets for GN pans for drawer	

### COSMO - wi-fi control

Cosmo is the wi-fi technology that allow to connect and monitor all Coldline appliances. Connect Prep-Station counters to a Cosmo hub (MODI, VISION or LEVTRONIC) and from the app you can check the operating conditions of each machine and receive alerts in case of

\*The installation requires a kit for the replacement of the racks

## Technical draw

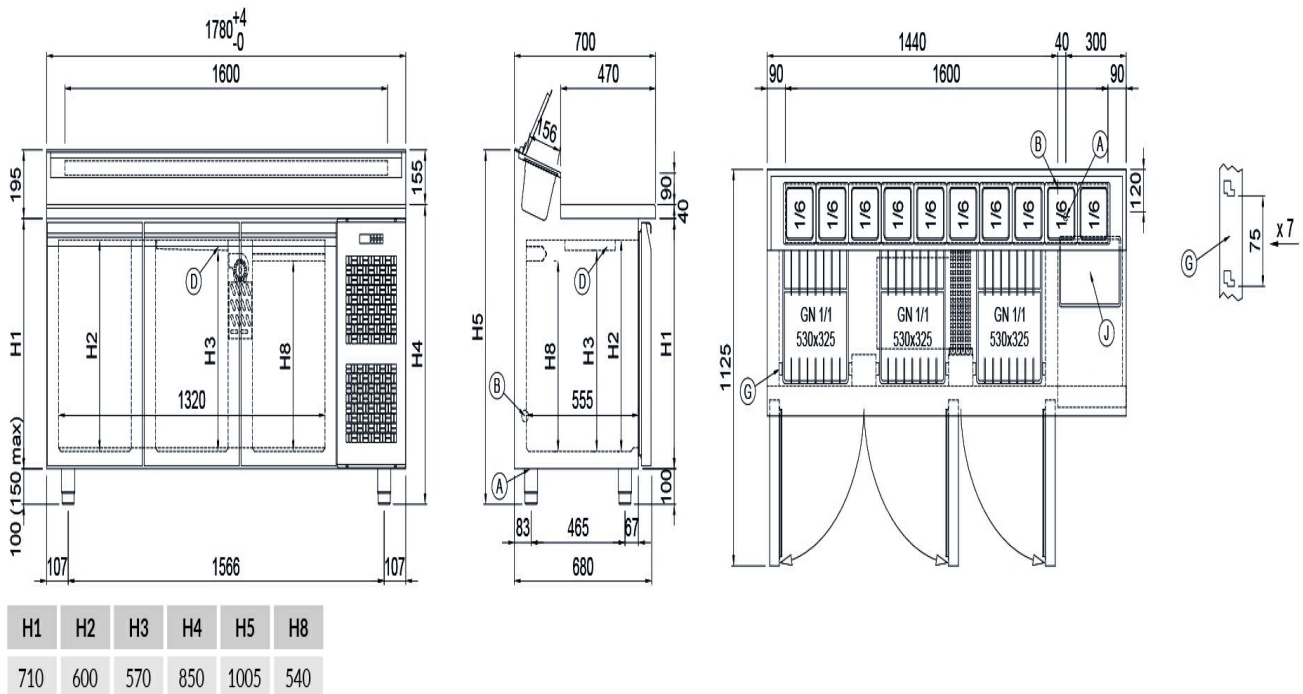

- A:** Power supply cable outlet      **B:** Condensation water drain      **D:** Airflow conveyor  
**G:** Racks pitch      **J:** Automatic evaporation of condensing water

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.