

Client _____ Quantity _____
 Project _____ Position _____

Pizza EN60x40 counter 3 doors

Model: TZ17/1M-710

Cod: T40303000261



Tavolo refrigerato Pizza con piano in granito, Plug-In, 3 porte con altezza corpo tavolo 710 mm, classe energetica B, classe climatica 5 heavy duty e gas refrigerante ecologico R290. Completo di 12 coppie guide inox per teglie EN60x40 ed è configurabile con cassettiere refrigerate e neutre. Range di temperatura -2°+8°C con refrigerazione ventilata. Struttura con isolamento 60 mm. Interno/esterno in acciaio inox AISI 304 compreso schiena esterna, fondo esterno in acciaio colaminato. Realizzato con tecnologia FSS - Fast Service System - per un service facile e veloce. Predisposto per collegamento a sistema di supervisione remoto.

Technical data

Top:	With top and splashback
Gross capacity:	607 lt
Temperature range:	-2°+8°C
Refrigerant unit:	Plug-In
Energetic class:	B
Energy efficiency index:	31
Annual consumption:	858 kW/h annum
24h consumption:	2,351 kW/h/24h
Climate class:	5
Cooling gas:	R290
Defrost:	Hot gas
Body height:	710 mm
Valve:	Supplied standard with solenoid
Dimensions (mm):	2005×800×1040 mm
Packing dimensions:	2100×900×998 mm
Gross weight:	260 Kg
Voltage:	220-240 V - 50 Hz
Total rate:	250 W
Absorbed Current:	1,15 A
Cooling capacity:	406 W*
*:	Evap. -10°C Cond. +55°C

Features

Standard equipment:	12 slides EN60x40
Control:	Electronic, display flush with the panel
Doors:	3 doors, self-closing, reversible with 105° stop
Door gasket:	Magnetic, triple chamber and easily replaceable
Insulation:	60 mm thickness - CFC/HCFC free
Exterior/interior finishing:	Exterior and interior AISI 304 stainless steel.
Inner corners:	Rounded for easy cleaning and ensuring maximum hygiene
Handle:	Stainless steel AISI 304, 2 mm thick
Racks and slides:	Stainless steel AISI 304
Feets:	Stainless steel AISI 304, adjustable h 100-150 mm
Cosmo:	Ready for connection to Cosmo Hub

Accessories and variants

Drawers 1/2
Drawers 1/3
Drawers 1/3 + 2/3
Lock with key for drawer 1/2
Lock with key for drawer 1/3
Lock with key for drawer 1/3 + 2/3
Plug-in water unit
Power supply frequency 60Hz
Other special voltage
Adjustable feet h 145/195 mm
6 Swivel and brake castors h 128 mm
Frame fitted with telescopic EN60x40 slides
EN60x40 Pizza container h 60 mm
Aluminium coated backing-pan EN60x40 h 20 mm
Pair of type L slides 605 mm
Serial interface, RS485 cable
Cosmo connection kit
IP44 schuko socket with cover


Removable plinth EN 3D h 50 mm
Removable plinth EN 3D h 100 mm
Removable plinth EN 4D h 150 mm

COSMO - wi-fi control

Cosmo is the wi-fi technology that allow to connect and monitor all Coldline appliances. Connect Pizza counters to a Cosmo hub (MODI, VISION or LEVTRONIC) and from the app you can check the operating conditions of each machine and receive alerts in case of abnormal functioning.

*The installation requires a kit for the replacement of the racks

Technical draw

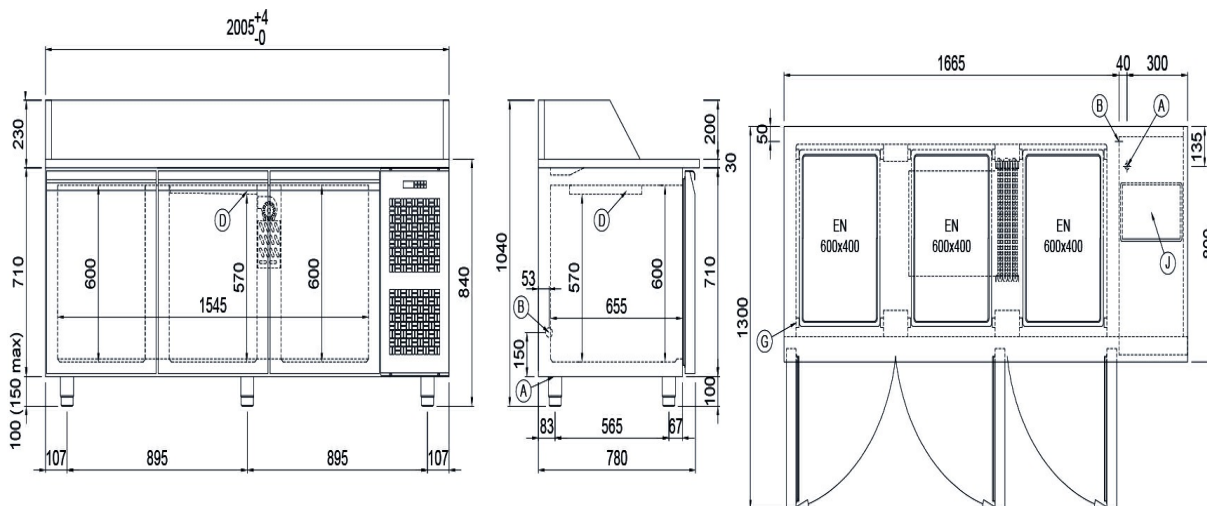

- A: Power supply cable outlet
- B: Condensation water drain
- D: Airflow conveyer
- G: Racks pitch
- J: Automatic evaporation of condensing water

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.