


Client _____ Quantity _____
 Project _____ Position _____

Pizza EN60x40 counter 3 doors with drawers

Model: TZ13/1MC-710

Cod: T40703000261

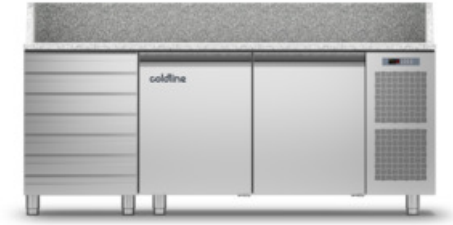

Tavolo refrigerato Pizza con piano in granito, Plug-In, 2 porte con 1 cassettiera con altezza corpo tavolo 710 mm, classe energetica B, classe climatica 5 heavy duty e gas refrigerante ecologico R290. Completo di 8 coppie guide inox per teglie EN60x40 ed è configurabile con cassette refrigerate e neutre. Range di temperatura -2°+8°C con refrigerazione ventilata. Struttura con isolamento 60 mm. Interno/esterno in acciaio inox AISI 304 compreso schiena esterna, fondo esterno in acciaio colaminato. Realizzato con tecnologia FSS - Fast Service System - per un service facile e veloce. Predisposto per collegamento a sistema di supervisione remoto.

Technical data

Top:	With top and splashback
Gross capacity:	389 lt
Temperature range:	-2°+8°C
Refrigerant unit:	Plug-In
Energetic class:	B
Energy efficiency index:	30,1
Annual consumption:	734 kW/h annum
24h consumption:	2,011 kW/h/24h
Climate class:	5
Cooling gas:	R290
Defrost:	Hot gas
Body height:	710 mm
Valve:	Supplied standard with solenoid
Dimensions (mm):	2005×800×1040 mm
Packing dimensions:	2100×900×998 mm
Gross weight:	250 Kg
Voltage:	220-240 V - 50 Hz
Total rate:	250 W
Absorbed Current:	1,15 A
Cooling capacity:	406 W*
*:	Evap. -10°C Cond. +55°C

Features

Standard equipment:	8 slides EN60x40
Control:	Electronic, display flush with the panel
Doors:	2 doors, self-closing, reversible with 105° stop
Door gasket:	Magnetic, triple chamber and easily replaceable
Insulation:	60 mm thickness - CFC/HCFC free
Exterior/interior finishing:	Exterior and interior AISI 304 stainless steel.
Inner corners:	Rounded for easy cleaning and ensuring maximum hygiene
Handle:	Stainless steel AISI 304, 2 mm thick
Racks and slides:	Stainless steel AISI 304
Feets:	Stainless steel AISI 304, adjustable h 100-150 mm
Cosmo:	Ready for connection to Cosmo Hub

Accessories and variants

Drawers 1/2
Drawers 1/3
Drawers 1/3 + 2/3
Lock with key for drawer 1/2
Lock with key for drawer 1/3
Lock with key for drawer 1/3 + 2/3
Plug-in water unit
Power supply frequency 60Hz
Other special voltage
Adjustable feet h 145/195 mm
4 Swivel and brake castors h 128 mm
Frame fitted with telescopic EN60x40 slides
EN60x40 Pizza container h 60 mm
Aluminium coated backing-pan EN60x40 h 20 mm
Pair of type L slides 605 mm
Serial interface, RS485 cable
Cosmo connection kit
IP44 schuko socket with cover


Removable plinth EN 2D h 50 mm
Removable plinth EN 2D h 100 mm
Removable plinth EN 2D h 150 mm

COSMO - wi-fi control

Cosmo is the wi-fi technology that allow to connect and monitor all Coldline appliances. Connect Pizza counters to a Cosmo hub (MODI, VISION or LEVTRONIC) and from the app you can check the operating conditions of each machine and receive alerts in case of abnormal functioning.

*The installation requires a kit for the replacement of the racks

Technical draw

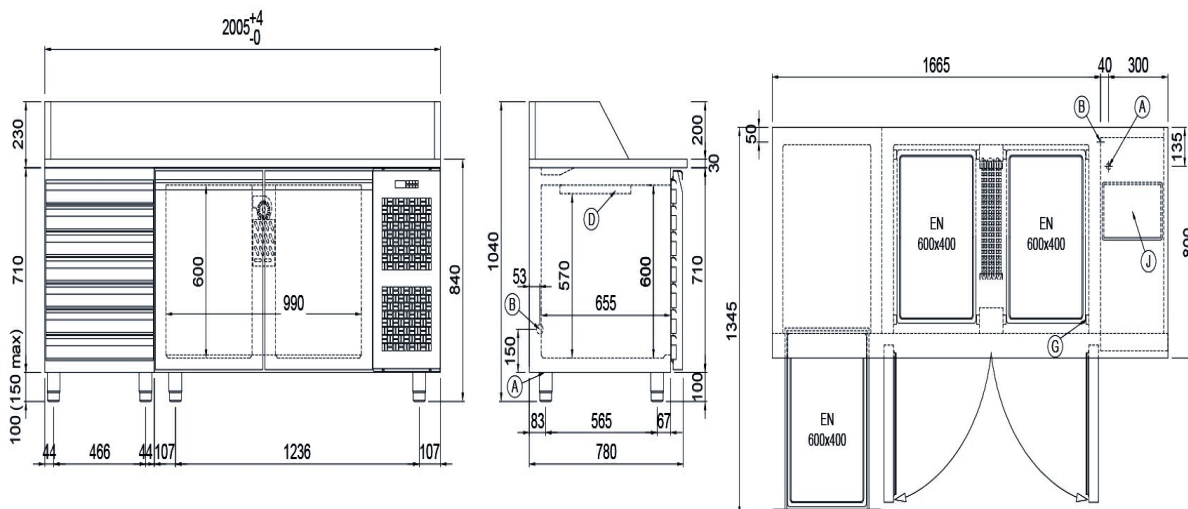

- | | | |
|-------------------------------------|---|----------------------------|
| A: Power supply cable outlet | B: Condensation water drain | D: Airflow conveyor |
| G: Racks pitch | J: Automatic evaporation of condensing water | |

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.